


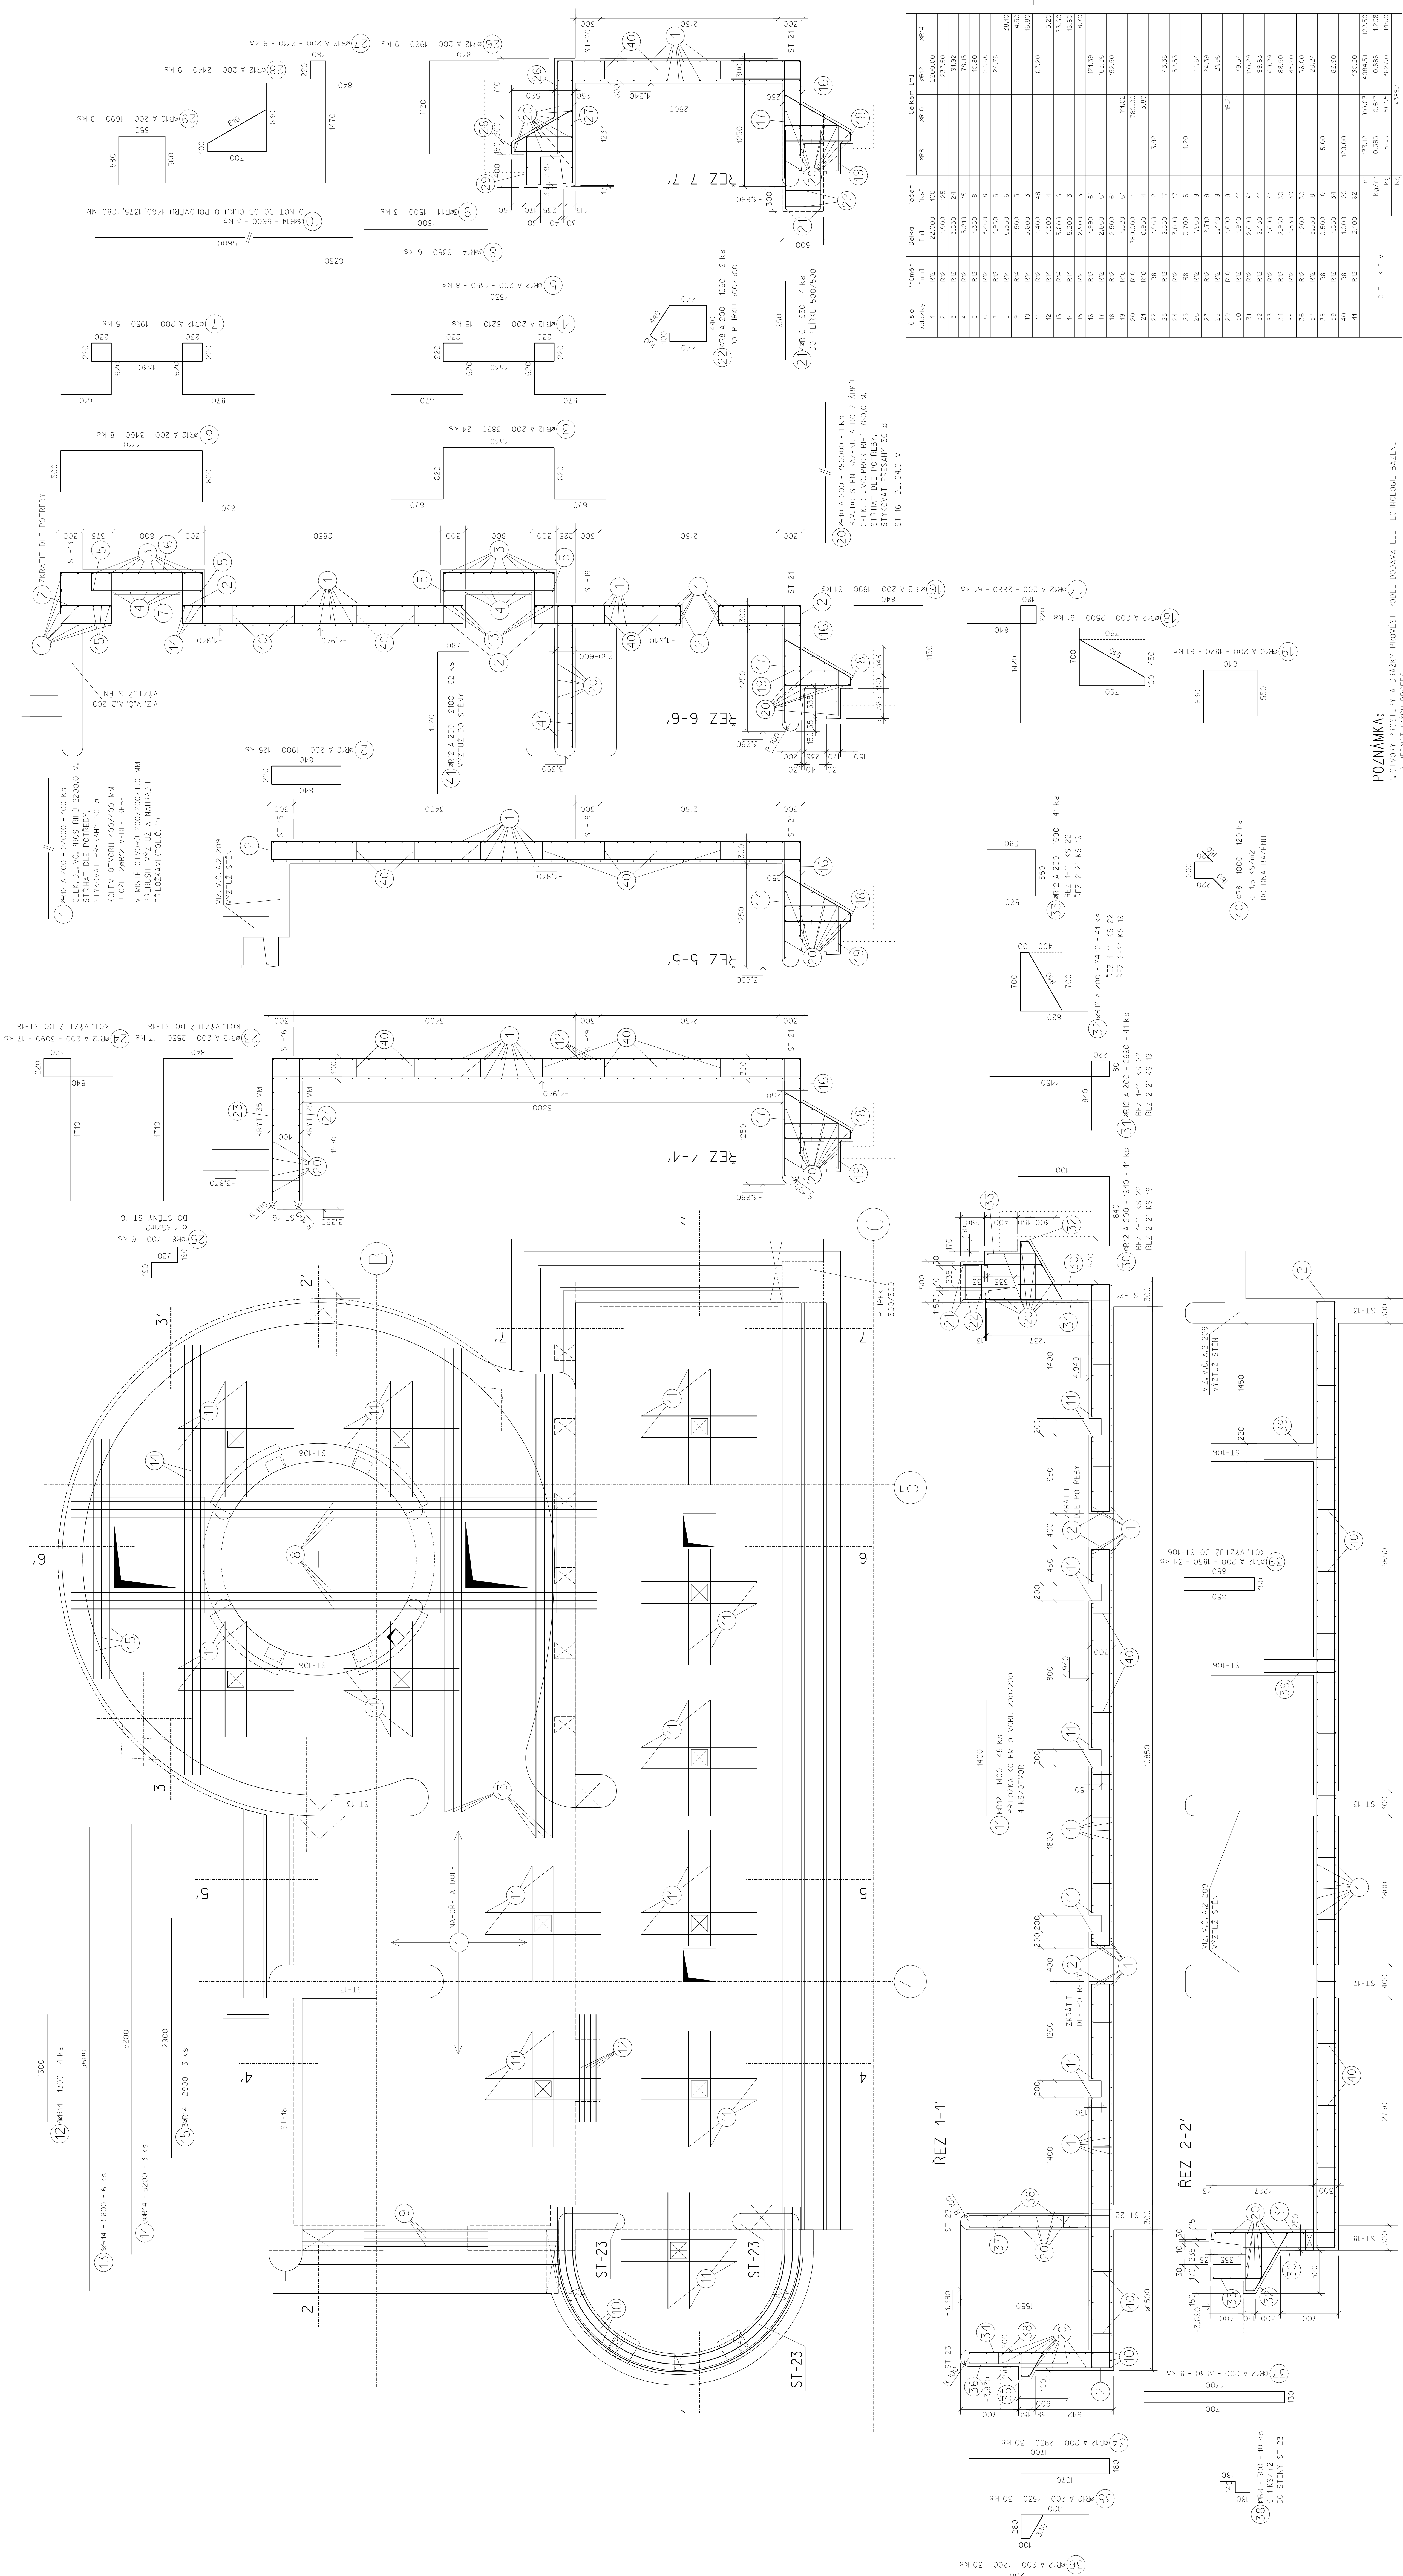

POZNÁMKA:

1. OTVORY PROSTUPY A DŘÁŽKY PROVĚST PODLE DODAVATELE TECHNOLOGIE BAZÉNU A JEDNOTLIVÝCH PROFESÍ.
2. PRACOVNÍ SPARY PROVĚST VODOTĚSNĚ (VLOŽIT TĚSNÍCÍ PLECH ILLICHMAN BK).

Category	Property	Unit	Value	Subcategory	Property	Unit	Value	Material Data			
								Material	Value		
Physical	Density	(g/cm³)	1.20	Mechanical	Modulus	(GPa)	10.0	Thermal	Thermal Expansion	(ppm/K)	15.0
	Thermal Expansion	(ppm/K)	15.0		Tensile Strength	(MPa)	150.0		Elongation at Break	(%)	5.0
	Specific Heat	(J/kg·K)	1000		Elongation at Break	(%)	5.0		Impact Resistance	(kJ/m²)	10.0
	Thermal Conductivity	(W/m·K)	0.5		Impact Resistance	(kJ/m²)	10.0		Hardness	(HV)	100
	Thermal Stability	(°C)	250		Hardness	(HV)	100		Wear Resistance	(mm³/kg)	1000
	Thermal Shock Resistance	(°C)	100		Wear Resistance	(mm³/kg)	1000		Creep Resistance	(%)	10.0
	Thermal Fatigue Resistance	(cycles)	10000		Creep Resistance	(%)	10.0		Corrosion Resistance	(%)	10.0
	Thermal Aging Resistance	(years)	10		Corrosion Resistance	(%)	10.0		Biocompatibility	(%)	10.0
	Thermal Oxidation Resistance	(years)	10		Biocompatibility	(%)	10.0				
	Chemical	Acid Resistance	(%)		100	Environmental	UV Resistance		(%)	100	Electrical
Alkali Resistance		(%)	100	Moisture Resistance	(%)		100	Conductivity	(S/m)	1.0	
Solvent Resistance		(%)	100	Temperature Resistance	(°C)		100	Dielectric Constant	(ε)	1.0	
Gas Permeability		(cm³/m²·s)	1.0	Pressure Resistance	(MPa)		10.0	Dielectric Loss	(tan δ)	1.0	
Gas Absorption		(cm³/m³)	1.0	Acoustic Resistance	(dB)		10.0	Dielectric Strength	(kV/mm)	1.0	
Gas Diffusion		(cm²/s)	1.0	Electromagnetic Interference	(dB)		10.0	Dielectric Breakdown	(kV/mm)	1.0	
Gas Permeability		(cm³/m²·s)	1.0	Electromagnetic Compatibility	(dB)		10.0	Dielectric Relaxation	(s)	1.0	
Gas Absorption		(cm³/m³)	1.0	Electromagnetic Interference	(dB)		10.0	Dielectric Aging	(years)	1.0	
Gas Diffusion		(cm²/s)	1.0	Electromagnetic Compatibility	(dB)		10.0	Dielectric Fatigue	(cycles)	1.0	
Electrical		Resistivity	(Ω·m)	1.0	Optical		Transmittance	(%)	100	Magnetic	
	Conductivity	(S/m)	1.0	Reflectance		(%)	10.0	Permeability	(μ)		1.0
	Dielectric Constant	(ε)	1.0	Refractive Index		(n)	1.0	Permeability	(μ)		1.0
	Dielectric Loss	(tan δ)	1.0	Optical Density		(OD)	1.0	Permeability	(μ)		1.0
	Dielectric Strength	(kV/mm)	1.0	Optical Absorption		(cm⁻¹)	1.0	Permeability	(μ)		1.0
	Dielectric Breakdown	(kV/mm)	1.0	Optical Emission		(nm)	1.0	Permeability	(μ)		1.0
	Dielectric Relaxation	(s)	1.0	Optical Scattering		(nm)	1.0	Permeability	(μ)		1.0
	Dielectric Aging	(years)	1.0	Optical Diffraction		(nm)	1.0	Permeability	(μ)		1.0
	Dielectric Fatigue	(cycles)	1.0	Optical Interference		(nm)	1.0	Permeability	(μ)		1.0
	Magnetic	Permeability	(μ)	1.0		Acoustic	Sound Velocity	(m/s)	1000		Thermal
Permeability		(μ)	1.0	Sound Absorption	(dB)		10.0	Tensile Strength	(MPa)	150.0	
Permeability		(μ)	1.0	Sound Reflection	(dB)		10.0	Elongation at Break	(%)	5.0	
Permeability		(μ)	1.0	Sound Transmission	(dB)		10.0	Impact Resistance	(kJ/m²)	10.0	
Permeability		(μ)	1.0	Sound Attenuation	(dB)		10.0	Hardness	(HV)	100	
Permeability		(μ)	1.0	Sound Amplification	(dB)		10.0	Wear Resistance	(mm³/kg)	1000	
Permeability		(μ)	1.0	Sound Damping	(dB)		10.0	Creep Resistance	(%)	10.0	
Permeability		(μ)	1.0	Sound Scattering	(dB)		10.0	Corrosion Resistance	(%)	10.0	
Permeability		(μ)	1.0	Sound Diffraction	(dB)		10.0	Biocompatibility	(%)	10.0	
Permeability		(μ)	1.0	Sound Interference	(dB)		10.0				

BETON C 25/30 XC1-PRŮSAK 50 MM

OCEL 10 505

KRYTÍ 25 MM