



VÝZTUŽ TRÁMU TO.1 – 1 KS

POHLED

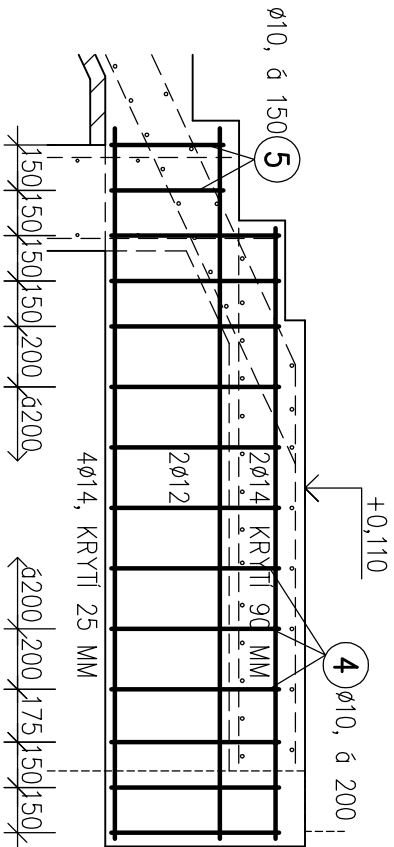

ŘEZ

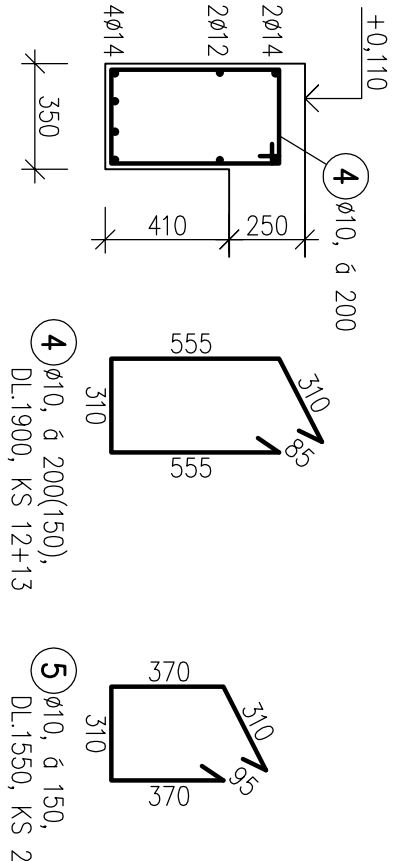


1 2ø14, DL.2000, KS 2

2 2ø12, DL.2350, KS 2


3 4ø14, DL.2350, KS 4

VÝZTUŽ TRÁMU TO.2 – 1 KS

POHLED

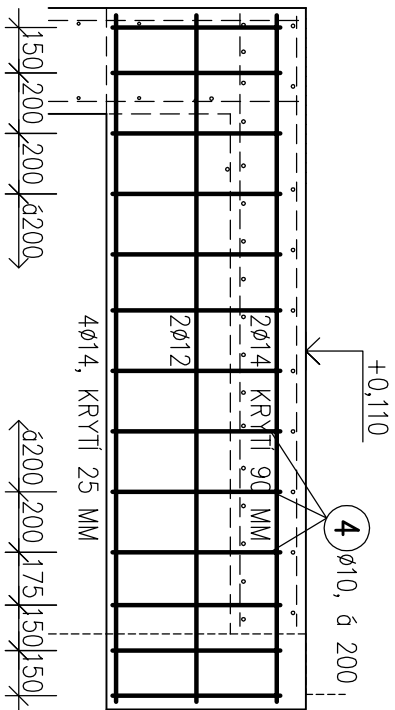

ŘEZ

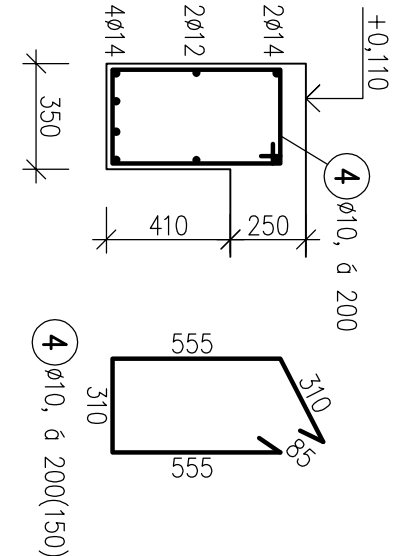

6 2ø14, DL.2250, KS 2+4

7 2ø12, DL.2250, KS 2

6 4ø14

BETON C30/37 XC4
S VODOTĚSNÍČÍMI PŘÍSLADAMI
OCEL B500B

VÝPIS VÝZTUŽE					
OCEL B500B					
POL	PROFIL	DL.	KS	10	12 14
1	14	2.00	2		4.00
2	12	2.35	2		4.70
3	14	2.35	4		9.40
4	10	1.90	25	47.50	
5	10	1.55	2	3.10	
6	14	2.25	6		13.50
7	12	2.25	2		4.50
CELKOVÁ DÉLKA (M)				50.60	9.20 26.90
HMOTNOST 1m ³ (KG)				0.616	0.887 1.208
CELKOVÁ HMOTNOST (KG)				31.2	8.2 32.5
SPOTŘEBA CELKEM (KG)					72 KG

VÝZTUŽ TRÁMU TO.1, TO.2

M 1:25
HERMANŮV MĚSTEC Č.P.4