



VÝZTUŽ VĚNCE V1

ŘEZ – 30 M’

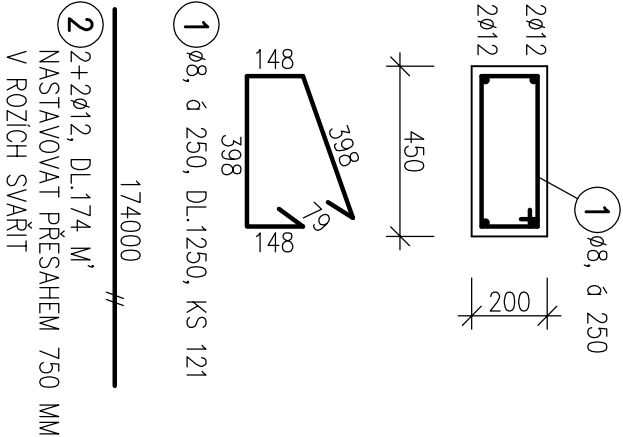


VÝZTUŽ VĚNCE V2

ŘEZ – 11,7 M’

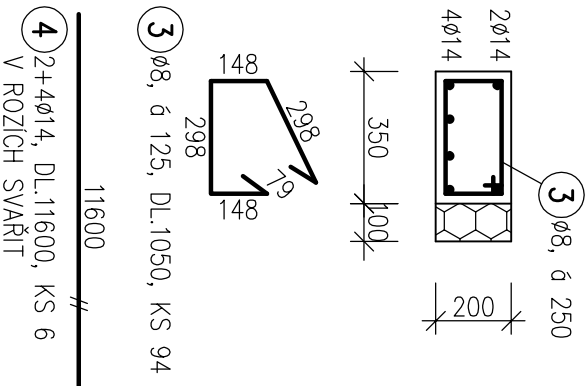


VÝZTUŽ VĚNCE V3

ŘEZ – 18,6 M’

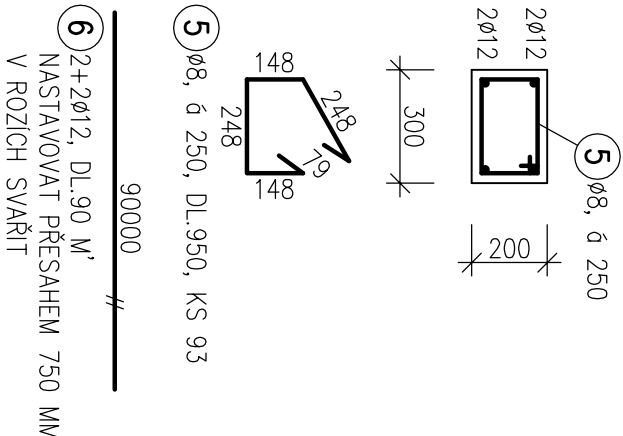


VÝZTUŽ VĚNCE V4

ŘEZ – 6,2 M’

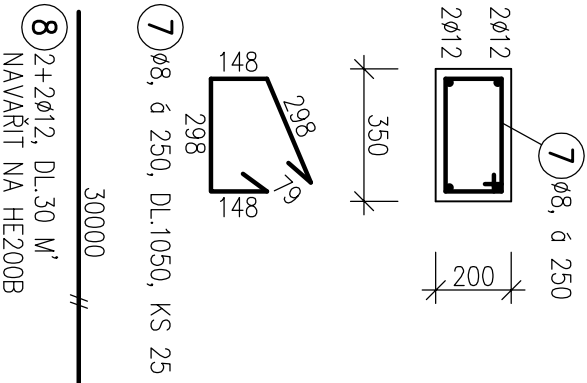

VÝZTUŽ VĚNCE V5

ŘEZ – 4,5 M’

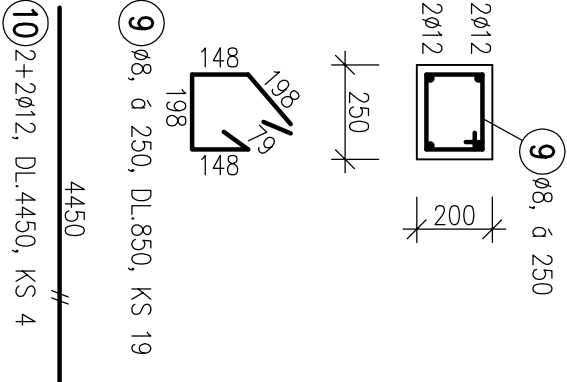

BETON C25/30 XC1

OCEL B500B

KRYTÍ 30 MM

VÝPIS VÝZTUŽE							
OCEL B500B							
POL	PROFIL	DL.	KS	8	12	14	
1	8	1,25	121	151,25			
2	12	174,00	1		174,00		
3	8	1,05	94	98,70			
4	14	11,60	6			69,60	
5	8	0,95	93	88,35			
6	12	90,00	1		90,00		
7	8	1,05	25	26,25			
8	12	30,00	1		30,00		
9	8	0,85	19	16,15			
10	12	4,45	4		17,80		
CELKOVÁ DÉLKA (M)				380,70	311,80	69,60	
HMOTNOST 1m’ (KG)				0,394	0,887	1,208	
CELKOVÁ HMOTNOST (KG)				150,1	276,7	84,1	
SPOTŘEBA CELKEM (KG)						511 KG	

VÝZTUŽ VĚNCE V1 AŽ V5